



HIGH PERFORMANCE STROLLERS



# Assembly Instructions

## **Performance Double**

**The Ultimate High Performance Double Jogging Stroller**

*This product complies with BS EN 1888:2003+A1-3*

*This product complies with ASTM F833-98*

*Read these  
instructions carefully  
before use and  
keep them for  
future reference.  
Your child's safety may be  
affected if you do not  
follow these instructions.*



**WARNING:** Ensure that all locking devices are engaged before use.

# Frame

**For the sake of your precious cargo, please read these warnings before using your Baby Jogger.**



• **WARNING:** Parcels or accessory items, or both, placed on the unit may cause the unit to become unstable.



• **WARNING:** Never leave your children unattended.



• **WARNING:** Recommended weight for seat pocket is 2 lbs (1 kg) and basket is 7 lbs (3.2 kg). Excessive weight may cause a hazardous unstable condition to exist.



• **WARNING:** Stroller is not meant to be used for transporting children up or down stairs. Damage resulting to stroller will not be covered under warranty.



• **WARNING:** Children may slip into leg openings and strangle. Never use in reclined carriage position unless safety harness is properly fastened.

• Accessories which are not approved by the manufacturer or distributor shall not be used.

• Always use your wrist strap – these strollers can really roll, and the wrist strap gives you control if you should slip or fall down.

• The passengers shall remain seated (no standing in the stroller).

• Watch out for cars – never assume that a driver can see you and your child.

• This stroller is suitable from 6 months to 5 years.

• Total weight load recommended for this stroller is 150 lbs (68 kg). (combined passenger and baggage weight)


• This stroller seats two passengers.

• It may be unsafe to use replacement parts other than those supplied or approved by the manufacturer.



• To assemble, simply unfold frame and insert the front of handle assembly into Base Bracket and lock together, securing with Snap Locks.

**NOTE:** Remove all protective caps from wheels prior to assembly.

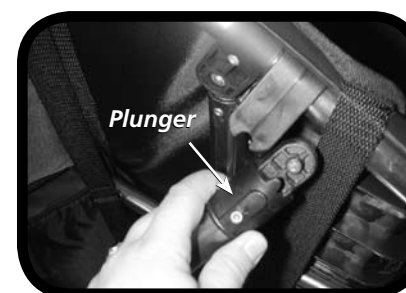

**1** Pull down the plunger on the side brace.



**2** Align corresponding side points and insert side brace into jawslide.



**3** Release plunger assembly when center points are aligned and seat together.

# Canopy



**1** To attach bracket to frame: Unsnap seats from frame to reveal mounting location. Use a Phillips head screwdriver to attach bracket screws to frame.



**2** To attach canopy to bracket: Insert canopy frame into bracket and attach screws using a Phillips head screwdriver.



**3** Secure outside Velcro canopy straps around frame and secure to itself.



**4** Now secure both canopies together using center Velcro straps, making sure they go behind the center bar on the stroller.

# Front Wheel

**1** To install front wheel, lay stroller back so handle is resting on floor.




**2** Insert the front wheel into the fork tips by aligning the axle flats with the fork tip flats.



**3** Secure front wheel to frame by turning the front wheel lever while holding the lock nut on the opposite side. Tighten until you feel tension on lever and then flip wheel lever over so that the word "closed" is visible. The wheel lever should face toward the rear wheels to prevent it from getting caught on something and releasing during use.



**4** To close V-Brake, pull on cable guide with your right hand while pushing the cantilever latch with your thumb. With your left hand push the other caliper arm toward your right hand and secure cable guide tube into cantilever latch. You will need to pull the accordion cable protector back in order to secure the cable guide tube into the cantilever latch.

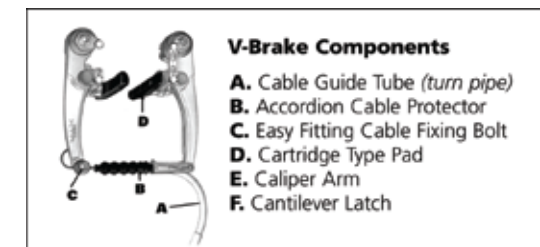

# Rear Wheels



- To install, gently slide the wheel's axle into the hole in the axle end until you hear it click into place.



- To remove, simply push in the spring lock while pulling out the wheel.




- Your stroller may have a push tab instead of the spring lock, the above steps will also work for strollers with the push tab.

# Safety Harness



- 1** Unclip top of shoulder strap from the seat and re-clip on the pair of seat loops closest to child's shoulder height.

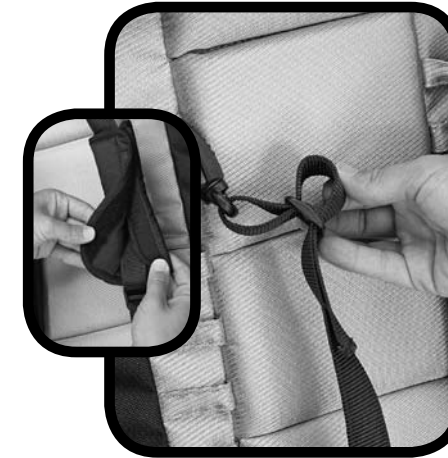

- 2** *To adjust the strap length:* Remove the shoulder pads and move the plastic guide up or down to lengthen or shorten.



- 3** *To unbuckle the harness:* Press one side of the center button and pull the corresponding side buckle away from the center buckle. Repeat to unbuckle other side. *To buckle:* Simply push side buckle into center buckle until it locks in place.



- 4** *To adjust side straps:* Press side buckle latch and slide strap to lengthen or shorten.



- 5** *To adjust the center strap:* Move its plastic guide up or down.



**WARNING:** Always use the crotch strap in combination with the waist belt.

# Brakes




**WARNING:** Jogger is packaged with the hand brake assembly loose. Tightening is necessary for safe operation.

## Hand Brake

- To use the hand brake feature, simply squeeze the brake handle.

## Adjusting the Brake

- If you do not have good braking action, simply squeeze the brake lever five or six times. If the problem persists, turn the cylinder ring clockwise and then turn the small ring counter clockwise to tighten the cable. To lock ring, hold the cylinder ring while turning the small ring counter clockwise.

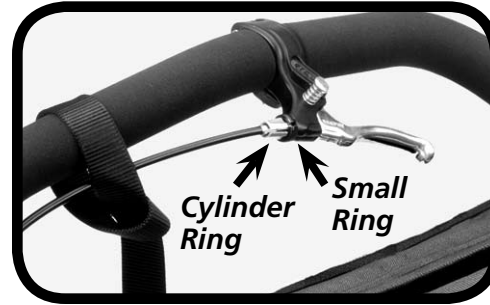

## Rear Wheel Brakes



- Push brake pedal down to engage rear parking brake.



- Lift brake pedal up to release rear parking brake.



**WARNING:** Engage parking device before loading and unloading passenger.

# Seat

**NOTE:** Some joggers are shipped with the canopy, seat and basket pre-assembled. Assembly instructions are given if any pre-assemble items are removed for cleaning or replacement.



**1** Snap seat to the frame.



**2** Attach bottom part of seat to footplate with the Velcro.



**3** Wrap bottom straps around frame, thread strap through D-ring and secure.



**4** Snap center anchor strap.



**5** Attach seat anchor straps to the rear frame uprights.

# Basket



**1** Snap front basket straps to seat's bottom straps.



**2** Snap rear snap strap around the upright.

**NOTE:** The rear of basket has the mesh material and the front doesn't.

# Reclining Seat



**1** To recline: Pinch the clamp and slide it down the recline strap to desired recline and push seat down.




**2** To return to the upright position: Hold the D-ring on the end of the recline strap in one hand and use the other to pinch the clamp and slide it up the strap.



Stroller is packaged with seat support frame and can be easily removed or inserted into the seat back if additional support is desired.

**NOTE:** Be sure to remove the board from the back of the seats before washing.

# Folding

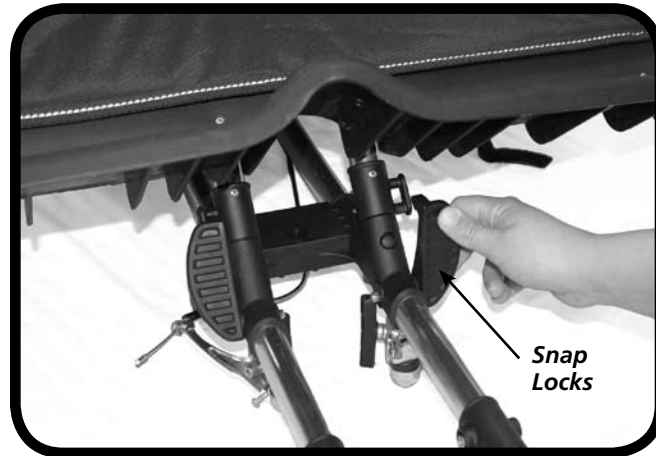

**1** Release the snap locks on both sides.



**2** To release handle from bottom assembly push thumb tab while pushing up on the footplate.



**3** Push handle frame back until handle foam grip rests on the ground, then pull the stroller axle upwards.

# In Motion

## Steering

- Steering your Performance Double is simple: it's balanced to turn with just a light touch on the handlebar. For tighter turns, push down on the handlebar and raise the front wheel to steer.

## Wrist Strap

- Make sure wrist strap is around your wrist whenever your baby is in the stroller. The Baby Jogger is lightweight and ready to roll – with or without you – and the wrist strap helps you gain control over your stroller.

## In the Dark

- Since we are concerned about the safety of you and your baby, we recommend that you not use your stroller at night. However, if you choose to, please attach reflective strips to the wheel spokes and the seat. Bicycle lights can also be mounted on the handlebar.

## Maintenance

- To preserve the longevity of your stroller, it is important to perform simple, regular maintenance. It is necessary to regularly check that the air pressure in your stroller's tires is the same P.S.I. that is shown on the tires. From time to time, make sure that the joints and folding areas are still in good condition. If you hear any squeaking or feel tension, you can take your stroller to a local bike shop for added lubrication. All repairs should only be carried out by an authorized dealer.

# Stroller Care

## Washing

- You can machine wash your stroller's seat in cold water with a mild detergent. To minimize shrinkage, simply reattach the seat to the frame to dry. (Please do not put the seat in the dryer!)
- Be sure to remove the frame from the back of the seat before washing.
- You may clean the stroller frame using a soft, dry cloth and an occasional spray of household wax will maintain its healthy glow.



## Wheel Care

- Moisture – especially from the beach – can rust your wheels and brake caliper. Spraying regularly with a silicone lubricant will keep your wheels looking healthy.
- Also, if you jog massive amounts of miles, your stroller will benefit from a yearly visit to the bike shop for wheel alignment. Refer to the number on the tire wall for the optimum pressure for your tires.

## Storing

- Sunshine can fade seat fabric and dry out tires, so storing your stroller indoors will prolong its good looks. However, if you do store it outside, using a tarp will help protect against weather wear.

## WARRANTY REGISTRATION ON-LINE AT [www.babyjogger.com/register](http://www.babyjogger.com/register)

### Baby Jogger's Limited Lifetime Warranty:

Baby Jogger warrants that the frame is free of manufacturer defects for the lifetime of the product. Manufacturer's defects include but are not limited to the breaking of welds and frame tube damage. Textile or soft side materials and all other components shall be warranted for one year from the date of purchase (except for tubes and tires). Proof of purchase is required to make a warranty claim and the warranty is only extended to the original purchaser.

#### THIS WARRANTY DOES NOT COVER:

- Normal wear and tear
- Corrosion or rust
- Incorrect assembly, or the installation of third party parts or accessories not compatible with the original design
- Accidental or intentional damage, abuse or neglect
- Commercial Use
- Improper storage/care of the unit

---

This warranty specifically excludes claims for indirect, incidental, or consequential damages. The implied warranties of merchantability and fitness for a particular purpose is according to the specific warranty period for this model unit at time of purchase. Some states do not allow the exclusion or limitation of incidental or consequential damages, so the above limitations or exclusions may not apply to you. This warranty gives you specific legal rights, and you may also have other rights which vary from state to state. To know what your legal rights are in your state, consult your local or state consumer affairs office or your state's Attorney General.

E-MAIL: [customerservice@babyjogger.com](mailto:customerservice@babyjogger.com)

CALL: 1-800-241-1848 between 8am – 6pm EST, Mon. – Fri.

FAX: 1-804-262-6277

MAIL: BABY JOGGER COMPANY  
8575 Magellan Parkway  
Suite 1000  
Richmond, VA 23227



# Thank You!

**We wish you many happy journeys with your new stroller! Your stroller is a great product, and we are proud to manufacture it. If you have any questions or comments, please call your nearest reseller.**



**H I G H P E R F O R M A N C E S T R O L L E R S**

***Baby Jogger is a Division of Dynamic Brands***

8575 Magellan Parkway, Suite 1000 • Richmond, VA 23227  
T: 800.241.1848 • F: 804.262.6277 • [www.babyjogger.com](http://www.babyjogger.com)