



Warranty

Each Steelcraft unit is thoroughly inspected in our Quality Assurance department prior to delivery. In the unlikely case that you find any faulty material or workmanship that affects the units normal operation, we will repair the unit free of charge within 12 months of purchase. You are required to present your receipt as proof of purchase. For all concerns with your product please contact our Customer Service team.

CUSTOMER SERVICE

1300 303 330 - Australia

0508 688 822 - New Zealand

Please read all the information carefully before using this product. This warranty does not apply to failure due to improper care, or normal wear and tear caused by product use. We reserve the right to inspect the unit. You may be charged for repairs if the product has been damaged accidentally.

Distributed by:

AUSTRALIA

BRITAX CHILDCARE PTY.LTD.
A Britax International company.
(Incorporated in Victoria)
A.B.N. 55 006 773 600
99 Derby Road, Sunshine,
Victoria 3020, Australia
Phone: (03) 9288 7288
Fax: (03) 9311 5798

NEW ZEALAND

BRITAX CHILDCARE NZ. Limited.
A Britax International company.
101 Diana Drive, Glenfield,
Auckland 9, New Zealand.
Phone: (09) 443 0102
Fax: (09) 443 0120

Due to our continuing program of development, Britax reserves the right to alter the specifications, colour or design without any further notice.

The Steelcraft trademark is the property of Britax Childcare Pty. Ltd-Australia.
The Britax trademark is the property of Britax Excelsior Limited - UK.
Visit the Britax website at: <http://www.britax.com.au> or email us at custserv@britax.com.au

Due to the variations in the style and design of our products the illustrations used in this instruction booklet are generic.
12/06 ©2006 Copyright Britax Childcare Pty. Ltd. Australia.

INSTRUCTION MANUAL

COMET Telescopic Stroller



KEEP INSTRUCTIONS FOR FUTURE REFERENCE



WARNINGS

READ ALL INSTRUCTIONS CAREFULLY BEFORE ASSEMBLY AND USE OF THE STROLLER. ALWAYS FOLLOW THE INSTRUCTIONS. THE CORRECT USE AND MAINTENANCE OF THIS PRODUCT IS ESSENTIAL.

- Check that all safety locks are engaged before placing a child in the stroller.
- Ensure your child is secured with a correctly adjusted safety harness.
- Do not leave children unattended.
- Always apply the brakes when parking the stroller.
- Never let go of the stroller when parked on an incline because it may slide.
- When making adjustments to the stroller, ensure that your child's body is clear of any moving parts, otherwise they may be injured.
- Remove child from the stroller before going up or down stairs or escalators.
- Do not lift the stroller by the armrest bar because it may disengage.
- Do not carry additional children on the stroller.
- Do not allow children to stand on the seat.
- Do not hang bags or goods from the handle as this could cause the stroller to tip over.
- Do not place more than 4kgs in the basket, 1kg in the boot cover pocket, 1kg in the canopy pocket, and 1kg in the parent tray.
- It may be unsafe to use accessories other than those tested and approved by Britax.
- To prevent the risk of the stroller catching fire, do not park it near an exposed heat source such as a radiator, open fire, barbecue, etc.
- The weight of the child using this product should not exceed 17kgs.

NOTE:

- The upright positions are not suitable for use with children less than six months old. The lowest recline position should be used for babies, and then the backrest can be adjusted to a more upright position as the child grows older and is able to support it's head without assistance.
- Always lock the front swivel wheels when on uneven surfaces to minimize wheel wobble.
- The canopy will not give your child total protection from the harmful rays of the sun.

THIS PRODUCT IS NOT INTENDED FOR COMMERCIAL USE.

21. CANOPY - REMOVAL

- Push and hold lever down with one hand to unlock it before sliding canopy base section forward with other hand to remove it.
- Repeat for other side of canopy.



22. ARMREST BAR REMOVAL

- Push up and hold levers on both sides to unlock them before sliding armrest bar forwards off of stroller frame.



23. STROLLER FRAME - CLOSING

- Engage rear brakes.
- Remove all objects from parent tray, canopy pocket, and basket before folding.
- Recline backrest to lowest position.
- Close canopy.
- With right hand, grasp handle centre section and use thumb to slide and hold small lever at bottom towards the right.
- Use right hand to rotate and hold handle centre section forwards.
- Use left hand to pull backwards and hold lever below left corner of handle grip.
- Push right hand forward slowly and stop close to canopy.
- Release lever below left corner of handle grip and then hold corner of handle grip with left hand.
- Remove right hand from handle centre section.
- Continue folding using left hand to slowly let handle grip all the way down.
- Engage storage lock on right side of stroller frame between front and rear legs.



NOTE: Removing canopy or adjusting it upright will shorten stroller total length when folded if needed.

16. LEG SUPPORT - ADJUSTMENT

- To lower leg support, first press upward and hold left and right side latches to unlock them, then tilt leg support downward.
- To raise leg support, lift up both sides until the latches lock.



17. SWIVEL LOCKS USE

- To lock swivels, press down both levers to locked position. (Swivels will lock automatically when wheels turn to straight forward position.)
- To unlock swivels, lift up both levers to unlocked position.



NOTE: Always lock front swivel wheels when on uneven surfaces.

18. BRAKES - USE

- To lock rear brakes, press down on brake lever in centre of rear axle until it clicks/locks.
- To unlock rear brakes, lift up brake lever until it clicks/unlocks.



NOTE: Always apply rear brakes when parking stroller.

19. BASKET

NOTE: This basket is provided for storing items totalling not more than 4 kgs.

20. PARENT TRAY - REMOVAL


- Pull and hold lower edge of one end outward as far as possible before lifting upward.
- Continue lifting free end upward to release other end.

CARE & MAINTENANCE

- To prolong the life of your nursery product keep it clean and do not leave it in the direct sunlight for extended periods of time.
- Removable fabric covers and trims may be hand washed using warm water with only a mild soap or a mild detergent. Allow it to dry fully, preferably away from the direct sunlight.
- Non removable fabric covers and trims may be spot cleaned using warm water with a damp sponge with only a mild soap or a mild detergent.
- When using your stroller at the beach, completely clean all the parts directly afterwards to remove the sand and salt especially from the mechanisms and wheel assemblies.
- Do not fold or store this product if it is damp or wet to avoid mould or mildew occurring. Always store this product in a well ventilated area.
- If the wheels or suspension squeak, use a silicon based spray ensuring it penetrates all of the wheel and axle or suspension assembly parts.
- If there are compression marks on the tyres, use a domestic hair dryer to gently warm the tyre and the compression marks should slowly disappear. (Do Not Overheat).
- Check parts regularly for tightness of screws, nuts and other fasteners, and tighten if required. To maintain the safety of your nursery product, seek prompt repairs for bent, torn, worn or broken parts. Use only those parts and accessories tested and approved by Britax.

PARTS LIST

- 1 x Stroller Frame
- 1 x Canopy
- 1 x Parents Tray
- 1 x Armrest Bar
- 2 x Front Wheel Sets
- 2 x Rear Wheels
- 1 x Rear Wheel Axle Bar
- 2 x Rear Wheel Brake Extensions
- 2 x Rear Wheel Hub Caps
- 2 x Rear Wheel Locking Clip Caps
- 2 x Rear Wheel Locking Clips

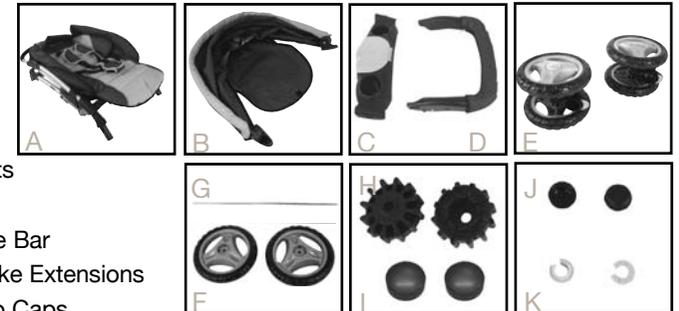

ASSEMBLY

1. CANOPY - FITTING

- Set stroller frame flat on floor face up. Push fabric away down beside connection tracks just below parents tray.
- Take canopy and hold with hinge connection slots face down and forwards.
- Line up hinge connection slots with connection tracks as shown.
- Slide hinges onto tracks towards the handle until they lock.



2. STROLLER FRAME - OPENING

- Grasp stroller handle under canopy.
- Lift upward until rear of frame starts to lift off the floor.
- Continue holding handle at the centre with one hand. Position right foot on brace at bottom rear section of frame marked 'OPEN'. Position free hand at top of canopy.
- All at the same time, push down on brace with right foot, push forward against canopy with one hand (without opening canopy), and pull handle towards you with other hand (level with handle tube) until you hear left & right sides of frame lock. (See photo.)





NOTE: Ensure that both sides of frame are locked by repeating step 'D' but this time pull at left & right corners of handle one at a time.

13. HARNESS ADJUSTMENT

- Open press-studs on fabric cover over centre buckle set before adjusting waist straps.
- Close press-studs on fabric cover when finished.

WARNING: Use this harness at all times.

A five-point harness is provided to restrain your child. To secure the child in the harness, push buckle (A) and (B) into the buckle housing (C) until the buckle prongs snap into position. Carefully adjust the harness by pulling the slider (D) until the desired fit is achieved in the lap, shoulder and crotch straps. Always adjust the harness when changing the seating position of the child. To release the buckle, squeeze the top and bottom prongs.



14. BOOTCOVER - USE

- To fit boot cover, slide bottom section under leg supports and then secure both top corner straps around base of left & right canopy hinges.
- To remove boot cover, reverse fitting procedure.


NOTE: It is recommended to fit armrest bar before using boot cover.



15. BOOT COVER POCKET - USE

- A pocket is provided on top of boot cover for small light weight items.

NOTE: Do not put more than 1 kg into boot cover pocket.




9. CANOPY - ADJUSTMENT

- A. To open canopy, push canopy front support tube forwards.
- B. To close canopy, pull canopy front support tube backwards.



10. CANOPY WINDOW - ADJUSTMENT

- A. To Open Canopy Window
 - Lift rear edge pulling apart Velcro sections.
 - Roll up window cover from rear edge forwards.
 - Secure by fitting elastic loop from one side over toggle on other side.
- B. To Close Canopy Window
 - Reverse opening procedure.



11. CANOPY POCKET - USE


- A. A pocket is provided on back of canopy for small light weight items.



NOTE: Do not put more than 1 kg into canopy pocket.

12. BACKREST - ADJUSTMENT

- A. To adjust more upright, push backrest forward slowly to desired position.
- B. To recline more, push and hold backrest slightly forward before pulling the adjustment bar up with moderate force. Hold adjustment bar up while pulling backrest backward to desired position.



Caution: Ensure that your child's body and limbs are in the centre of the seat before adjusting the backrest. Be prepared to support your child's weight when reclining the backrest.

3. FRONT WHEEL - FITTING



- A. Tip stroller over upside down onto a clean surface.
- B. Take one front wheel set and hold centre section with swivel lock levers face up and forwards.
- C. Line up top hole of wheel set with end of front leg and then slide on all the way.
- D. Press down tab at bottom of centre section with moderate force and hold, and then wiggle wheel set back & forth while pushing down further onto front leg until centre section locks.
- E. Repeat steps 'B' to 'D' for other front wheel set.



NOTE: Ensure both front wheel sets are locked on by trying to pull them off.

4. REAR AXLE & WHEEL - ASSEMBLY


- A. Keep stroller upside down.
- B. Take rear wheel axle bar, line up and insert into hole beside rear brake.
- C. Take one rear wheel & one rear wheel brake extension, line up inside of extension & inside of wheel rim, and fit together as shown.
- D. Line up brake extension centre hole with axle bar and fit wheel onto axle.
- E. Take one rear wheel locking clip and push onto end of axle until it locks on.
- F. Take one rear wheel locking clip cap and push on top of locking clip until it locks on.
- G. Line up axle bar with hole on other side of rear brake and push through.
- H. Repeat steps 'C' to 'F' for second rear wheel.
- I. Take rear wheel hub caps and fit onto centre of wheel rims.



NOTE: Ensure both rear wheel sets are locked on by trying to pull them off.

5. ARMREST BAR - FITTING

- A. Turn stroller face up.
- B. Take armrest bar and hold it with ends facing away from you with rounded side face up.
- C. Line up slots in ends of armrest bar with tracks on inside face of frame at top of front legs, and push armrest bar part way onto tracks.
- D. One side at a time, hold stroller frame just above armrest bar with one hand and then push armrest bar towards seat until it locks with the other hand.



NOTE: Do not lift stroller by bumper bar because it may disengage.

6. PARENTS TRAY - FITTING


- A. Fit locating hole at one end of tray over locating post on outer face of handle tube just below handle soft grip and hold it in position.
- B. Rotate free other end downward in line with other post and push it with moderate force over post until it locks.



ADJUSTMENT / USE

7. STROLLER FRAME - OPENING

- A. Release storage lock on right side of stroller frame between front and rear legs.
- B. Grasp stroller handle under canopy.
- C. Lift upward until rear wheels start to lift off floor.
- D. Continue holding handle at the centre with one hand. Position right foot on brace at bottom rear section of frame marked 'OPEN'. Position free hand at top of canopy.
- E. All at the same time, push down on brace with right foot, push forward against canopy with one hand (without opening canopy), and pull handle towards you with other hand (level with handle tube) until you hear left & right sides of frame lock. (See photo.)



NOTE: Ensure that both sides of frame are locked by repeating step 'D' but this time pull at left & right corners of handle one at a time.

8. PARENTS TRAY - CENTRE SECTION

- A. Cup holders on both sides are provided for drinks, and centre section lid can be opened to access a storage compartment.

Caution: Be careful when keeping hot drinks in the cup holders.

