

valco
baby

PRODUCT REFERENCE GUIDE

BUGGSTER BASSINET

Thank you for purchasing a quality VALCO product. Please read and follow the instructions outlined in this guide carefully. Familiarise yourself with the construction and safety features; be sure that you understand all the warnings and safety guidelines before use.

Retain this guide in a safe place for future reference.



Due to our policy of continuous product development, this product is constantly evolving. It is possible that some features or procedures outlined here have changed since this document was written. If you are unsure of any procedure shown here, please contact us via the web at info@valco.com.au to obtain the most up to date information before use. Include the batch number, which can be found on a sticker on the frame.

All pictures and diagrams herein are provided for illustration purposes only. Actual product, colour or fabric may vary. VALCO reserves the right to modify or alter any specification or colour without notice or obligation to modify any product previously purchased

FURTHER INFORMATION

In Australia/New Zealand

www.valco.com.au
www.valco.co.nz


In North America only

www.valcobaby.com
1800 610 7850

REMOVE THE FRONT BUMPER BAR

FIGURE A

1. Press the locking button on the inside of the bumper bar housing (1) and lift it out. Repeat for the other side.

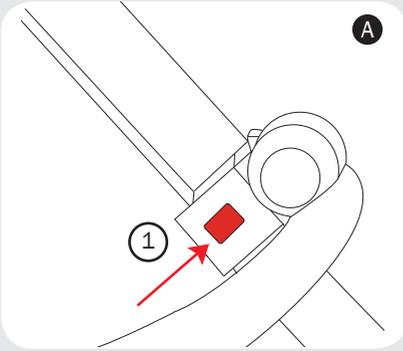

REMOVE THE STROLLER FABRICS

FIGURE B

1. Disconnect the seat tethers at the rear of the seat from the frame by pushing firmly on the long side of the clip, forcing the rivet head through the narrow channel (2). Repeat for the other strap.


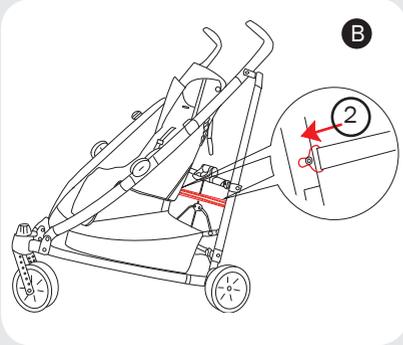


FIGURE C

1. Open each of the four flaps which cover the zippers located along the inside length of the stroller frame.
2. Lift the elastic ends of the zippers off the securing rivet heads (3). HINT: Note the location of each of these rivet heads for when you will re-install your stroller fabrics.
3. Unzip the fabrics (3) & (4) from the stroller frame.
4. Slide the bottom of the fabrics from the slot in the housing in the rear of the front wheel swivel system.

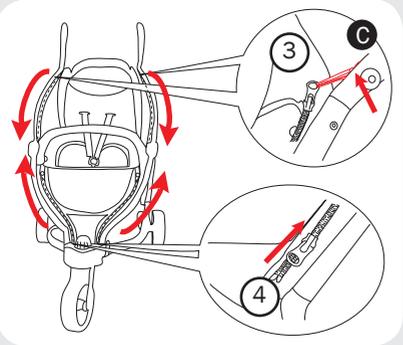


BE SURE TO WRAP YOUR FABRICS AND STORE THEM IN A COOL DRY PLACE.

INSTALLING THE BASSINET ADAPTORS

FIGURE D

1. Pull the locking lever inward (5) and slide the hinge cover (6) upward, toward you. Repeat for the other side. Store in a safe place as you will need to replace them when you reinstall your stroller fabrics.

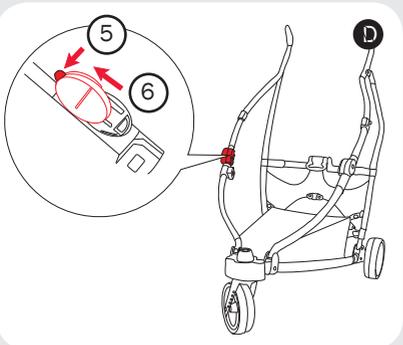

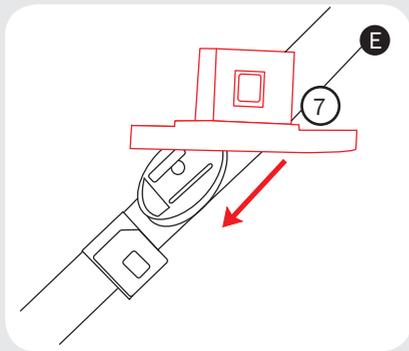


FIGURE E

1. Aligning the tracks at the rear of the bassinet adaptor with those in the uncovered hinge, slide the adaptor (7) downward onto the hinge, until you feel it secure in place. Repeat for the other side.

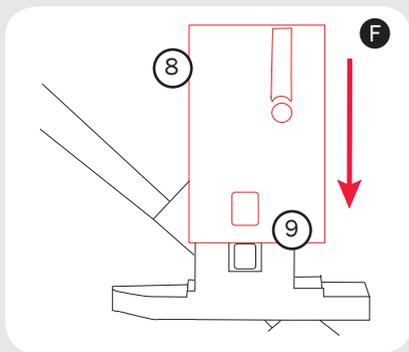


FIGURE F

1. Place the adaptor extension over the bassinet adaptor (8) making sure that the locking button (9) catches in the adaptor hole. Repeat for the other side. Ensure adaptors are locked firmly into position. **IMPORTANT:** You may find these extensions stored in the housings on each side of the bassinet.

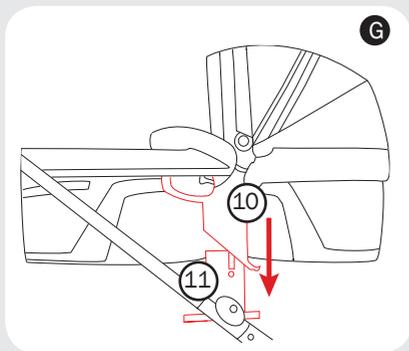


FIGURE G

1. Standing at the side of the chassis, and holding the bassinet at both sides by the plastic hand holds, tilt the bassinet slightly toward you.
2. Gently slide the bassinet into the chassis, so that it is facing towards the handles.
3. Gently slide the bassinet into the chassis, so that it is facing towards the handles. Align the plastic housing on the side of the bassinet (10) over the bassinet adaptor on the chassis (11) that is closest to you.
4. "Line up" the other side of the bassinet with the corresponding bassinet adaptor.
5. Press down gently on the bassinet and it should slide into place.

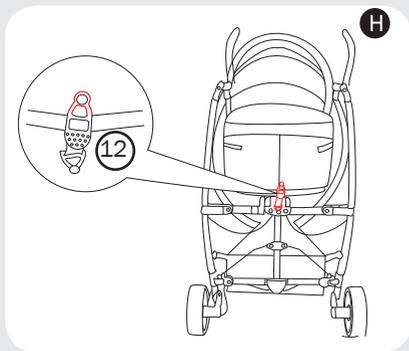


FIGURE H

1. For greater security you can additionally secure your bassinet to the frame by sliding the locking strap "keyhole clip" over the locking rivet head (12) and pulling it firmly through the narrow channel, locking it in place.
2. To remove your bassinet: If the locking strap is engaged, reverse the procedure outlined in Figure H No. 1.
3. Holding the bassinet by the plastic grips at either side, simultaneously press the two triggers located inside each grip.
4. Gently lift the bassinet from the frame.

INSTALLING / REMOVING YOUR BASSINET

WARNINGS

Your child's safety is your responsibility

- This carrycot must not be used on a stand.
- Never leave your child unattended.
- Please grip the harness of the carrycot in such a way that you keep the carrycot balanced and the carrycot with the child remains in the horizontal position.
- This product is only suitable for a child that cannot sit up on its own or roll onto its side and cannot support itself on its hands and knees.
- Maximum weight of a child: 9kg.
- Only place the carrycot down on a firm, horizontal and dry surface.
- Do not allow other children to play near the carrycot unattended.
- Do not use the carrycot if any parts are broken, torn or missing.
- Only use spare parts or accessories that are supplied or approved by the manufacturer.
- Be aware of hazards caused by open fires and other sources of heat, such as electrical heaters, gas flames, etc., if they are in the immediate vicinity of the carrycot.
- If you are using a mattress in the carrycot, please make sure that the dimension between the child's reclining surface and the upper edge of the carrycot is not less than 17cm.
- Please inspect the handles and the base regularly for wear and damage.

The logo for Valco Baby, featuring the word "valco" in a large, lowercase, sans-serif font above the word "baby" in a smaller, lowercase, sans-serif font, both in white on a black rectangular background.

In Australia/New Zealand

www.valco.com.au
www.valco.co.nz

In North America only

www.valcobaby.com
1 800 610 7850