

IMPORTANT WARNINGS AND CAUTIONS

Remember...your child's safety is your responsibility

- ✓ BE SURE THAT ALL CLAMPS AND BUCKLES ARE SECURELY LOCKED INTO PLACE BEFORE USE.
- ✓ NEVER LEAVE YOUR CHILD UNATTENDED FOR ANY REASON.
- ✓ THE MAXIMUM WEIGHT FOR A CHILD IN THIS BASSINET IS 10 kg's.
- ✓ NEVER JOG OR RUN WITH A BABY IN ANY PRAM OR STROLLER UNTIL THE BABY CAN PROPERLY SIT UP UNASSISTED. (Approximately 6 months but varies from child to child)
- ✓ DO NOT HANG BAGS FROM THE HANDLE AS THIS MAY AFFECT THE STROLLERS STABILITY. ALWAYS USE THE STROLLER BASKET.
- ✓ THE MAXIMUM WEIGHT IN THE STROLLER BASKET IS 6kg's.
- ✓ NEVER USE THIS STROLLER ON STAIRS OR ESCALATORS.
- ✓ CHECK ALL PARTS FOR BREAKAGE OR FATIGUE BEFORE USE. DISCONTINUE USE IMMEDIATELY IF ANY PART IS FOUND TO BE DAMAGED OR BROKEN.
- ✓ CHECK AND TIGHTEN ALL NUTS & BOLTS BEFORE USE.
- ✓ THIS PRODUCT IS INTENDED FOR DOMESTIC USE ONLY. IT IS NOT INTENDED FOR COMMERCIAL USE.
- ✓ DO NOT CARRY ADDITIONAL CHILDREN. IT MAY BE UNSAFE TO USE ANY ACCESSORIES OTHER THE THOSE APPROVED BY VALCO BABY.
- ✓ NEVER CARRY YOUR STROLLER WITH A CHILD IN IT.

Should the chassis become wet, dry off promptly before storing. If this pram is used near the ocean or salted roads, spray the chassis and seat frame with water and dry thoroughly. This is especially important for metal parts such as wheel spokes and springs. We recommend a rust inhibiting product should be used to prevent rust and fatigue on these metal parts.

We recommend that you wipe down axles and lubricate the wheels every 3 months. Sand and dirt can grind down axles, if you live near the beach or in a dusty environment you must wipe down the axles and wheels then lubricate them *MONTHLY*.

AXLES ARE BEST LUBRICATED WITH GREASE OR PETROLEUM JELLY. SILICONE BASED LUBRICANTS ARE ACCEPTABLE. DO NOT USE OIL BASED PRODUCTS.

Should you experience any difficulty with your VALCO product, your local retailer (from where it was purchased) is the first "port of call," as they are in the best position to help. They will make all the necessary arrangements to ensure that your VALCO product is operating correctly.



Visit us on the web at
www.valco.com.au

valco
baby



BASSINET




REFERENCE GUIDE

IMPORTANT: Please read this instruction guide before assembling and/or using your product. Retain for future reference.

Thank you for purchasing a quality VALCO product. Due to our policy of continuous product development, this product is constantly evolving. It is possible that some features or procedures outlined here have changed since this document was written. If you are unsure of any procedure outlined here, please contact the store from which you purchased it to obtain the most up to date information, or contact us at cust.service@valco.com.au via the internet.

Pre-Installation


1. Remove the seat fabrics and from your RUNABOUT stroller.
2. Inside your bassinet package you will find a set of 2 plastic locking pieces.
3. With the release buttons facing inward, insert each locking piece in turn into the plastic housing on either side of the stroller frame.

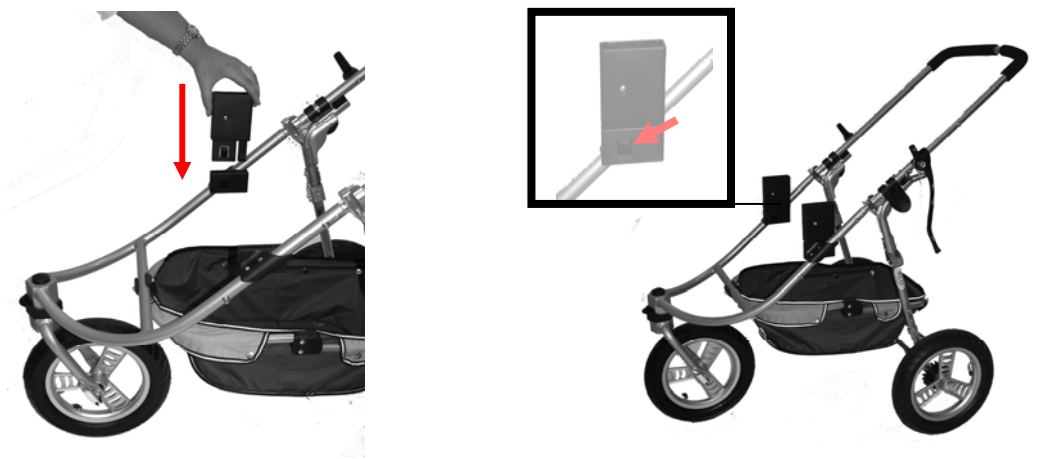

Installing the bassinet



1. Standing at the side of the stroller and holding the bassinet at both sides by the plastic hand holds; tilt the bassinet slightly toward you.
2. Gently slide the bassinet housing just over the plastic locking piece closest to you.
3. "Line up" the other side and repeat step 2.
4. Press down gently on the bassinet and it will slide into place.
5. To remove, simultaneously pressing the two triggers in the plastic hand holds, gently lift the bassinet from the frame.

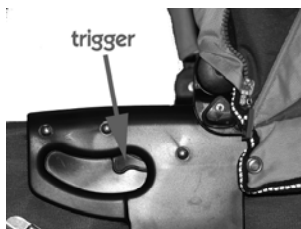


IMPORTANT: ALWAYS TEST THAT THE BASSINET IS SECURED IN PLACE BY GRASPING ON EITHER SIDE AND FIRMLY PULLING IT UP TOWARD YOU BEFORE USE!

Your Runabout DELUXE bassinet has been designed to maintain a consistent rocking motion while in motion. Should you wish to secure this motion, we have added an additional securing tether at the rear of the bassinet.

Using the securing tether


1. Remove the tether strap from the pocket at the "foot" of the bassinet.
2. Drape the strap over the top of the bassinet.
3. Thread the buckle prongs through the space **behind** the plastic footplate.
4. Circle the plastic footplate with the tether and back up to secure in the buckle.
5. Pull the webbing to tighten

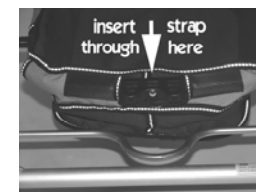

NOTE: BE SURE TO UNDO THE SECURITY TETHER BEFORE REMOVING YOUR BASSINET FROM THE FRAME



Using your hood

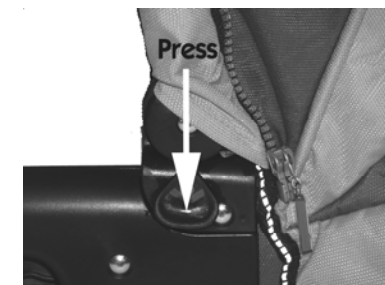

Your Runabout DELUXE bassinet was designed to be easily carried due to the unique design of the hood.

To carry the bassinet, grab the padded hood bar at the top of the hood and away you go! The hood system is permanent and has been designed so that the hood will not collapse when carried.

To fold the hood down, press down on the hood lock (one side only) and simultaneously fold the hood back.

To secure your hood open, simply reverse the previous process till you hear the hood lock into place.

NOTE: ALWAYS TEST THAT YOUR HOOD IS SECURELY LOCKED INTO THE OPEN POSITION BEFORE USE.