

Warnings and Cautions

REMEMBER...YOUR CHILD'S SAFETY IS YOUR RESPONSIBILITY

- ❖ Be sure that all clamps and buckles are securely fixed into place before use.
- ❖ Moving parts may be lubricated with silicone spray - **DO NOT USE OIL.**
- ❖ The maximum weight of each child in this model is 16 kg's with a maximum combined total weight of 32 kg's.
- ❖ Recommended from birth in the rear seat with appropriate harnessing and securing.
- ❖ Your child should never be left unattended. When in the stroller each child must always wear a safety harness, correctly fitted and adjusted, at all times.
- ❖ Do not hang shopping bags from the handle as this may affect the stroller's stability.
- ❖ Avoid serious injury, always remove child(ren) from the stroller before going up or down stairs or on escalators.
- ❖ Always use the basket provided - the maximum weight in the basket is 3 kg's.
- ❖ The seat fabrics may be washed by gently sponging with mild soap in warm water. Dry naturally.
- ❖ Do not use this product while running, jogging, in-line skating or while participating in any athletic activity.
- ❖ Check all parts before use for breakage or fatigue. Discontinue use immediately if any part is found to be damaged or broken.
- ❖ Do not carry additional children. It may be unsafe to use any accessories other than VALCO approved.
- ❖ Make sure that any part of the child's body is clear of all moving parts before making any adjustments.
- ❖ Your VALCO product is intended for domestic use only. It is not intended for commercial use.
- ❖ Never carry your stroller with a child in it.
- ❖ To prevent the risk of your stroller fabrics catching fire,, do not park it near any type of open flame or heater.

Should the chassis become wet, dry off promptly before storing. If this pram is used near the ocean or salted roads, spray the chassis and seat frame with water and dry. We recommend a rust inhibiting product should be used to prevent rust and fatigue on metal parts.

We recommend that you wipe down axles and lubricate the wheels every 3 months. Sand and dirt can grind down axles, if you live near the beach or in a dusty environment you must wipe down the axles and wheels then lubricate them **MONTHLY.**

AXLES ARE BEST LUBRICATED WITH GREASE OR PETROLEUM JELLY. SILICONE BASED LUBRICANTS ARE ACCEPTABLE. DO NOT USE OIL BASED PRODUCTS.



...because you care

Should you experience any difficulties with your VALCO product, your local retailer, from whom you purchased it, is in the best position to help. Contact your local retailer who will make all the necessary arrangements to ensure that your product is functioning correctly.



...because you care

Twin Sportz
Twin Sportz



Visit us on the web at:

www.valco.com.au

IMPORTANT: Please read the following instructions carefully before assembling this product, then retain for future reference.

ASSEMBLY



- Remove your stroller from the carton and lay it flat on the floor.
- If the locking lever (attached to the central handle) is engaged, press the handles and legs together to relieve the pressure and release the locking clamp.
- Lift the handles upward toward you.
- With the rear frame legs standing on the floor, press down with your foot on each of the frame locks until the frame locks fully open.

INSTALLING THE WHEELS



- With the brake lever in the disengaged position and facing away from the stroller, insert each wheel assembly onto each rear chassis leg.
- Push the wheel assembly upward until it locks into place.



- Lie the stroller back so that the handles are lying on the floor.
- Insert each front wheel assembly (with the locking tab at the top) onto each front leg housing until it locks into place.

TEST THAT EACH WHEEL IS FIRMLY LOCKED ONTO THE CHASSIS BY PULLING ON THE WHEEL ASSEMBLY




Bed Guards

When your child is ready to move from a cot to a bed, the VALCO bedguards are designed to help prevent falling out of bed during sleep. Both models feature our unique "NO TOOLS" construction for simple and quick assembly.

Fixed Model

FEATURES:

- STRONG METAL FRAME
- SOFT MESH BODY
- NO TOOLS
- EASY ASSEMBLY
- 2 COLOURS

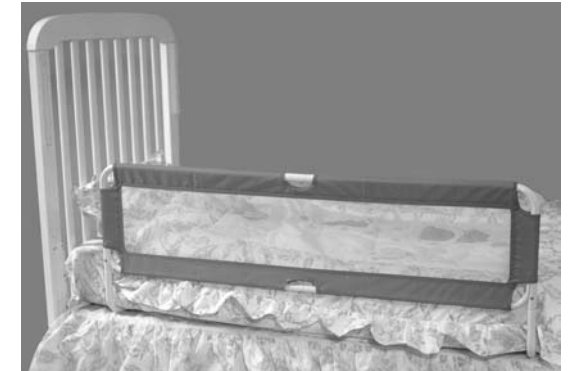

Fold Down Model

FEATURES:

- STRONG METAL FRAME
- SOFT MESH BODY
- NO TOOLS
- EASY ASSEMBLY
- 2 COLOURS
- FOLDS OUT OF THE WAY WHEN NOT IN USE OR FOR STORAGE UNDER THE MATTRESS



LOOK FOR OTHER VALCO PRODUCTS FOR YOUR HOME/CHILD

Swing Back Gate

VALCO






Designed to fit doorways from 75 – 97 cm (109 cm with the optional extra extension panel), the Swing Back gates are strong, durable, easy to install and operate.

FEATURES INCLUDE:

- Patented hinge allows the gate to swing closed automatically.
- ONE HAND OPERATION.
- Dual safety locks prevent opening by young children.
- Twin latches hold gate firmly closed at both top and bottom.
- Includes 4 wall/doorway mounting cups for extra security.
- Includes 1 extension panel.
- Two Models – Plastic Gate and Wire Gate (metal frame identical on both).

INSTALLING THE HOOD

- Clip the side hood channels onto either side of the stroller frame, just above the folding pivot.
- Clip the center channel to the center handle just above the holding rivet.
- Secure the top section of each hood to the frame using the webbing strap.
- Secure the rear of the hoods around the center handle using the webbing strap.

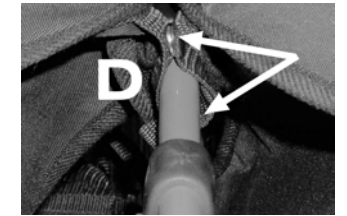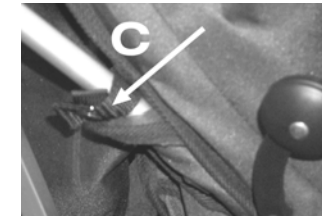


YOUR TWIN SPORTZ STROLLER IS NOW READY FOR USE

USING YOUR BRAKES


- To engage, press down on each brake lever until the pin engages in the wheel cog.
- To disengage, lift the brake lever till it locks.

NOTE: ALWAYS ENGAGE ALL 3 BRAKES AND TEST THAT THERE IS NO WHEEL MOVEMENT AFTER ENGAGING THE BRAKES.
NEVER PARK YOUR STROLLER WITHOUT ENGAGING THE BRAKES.

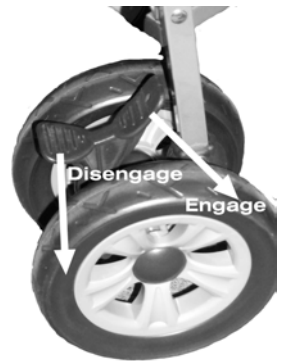


LOCKING YOUR SWIVEL WHEELS

- To lock, center the notch in the front wheel housing in the wheel and press down on the locking tab till it engages. You may need to rotate the wheel housing slightly. Repeat for all front wheels and test to be sure that each has locked into place.
- To unlock, lift the locking tab till it clicks in the upper position.

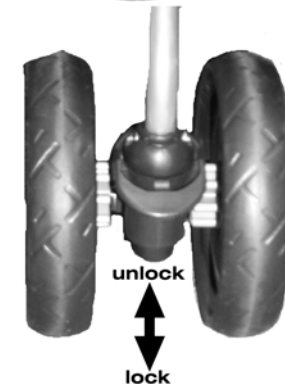

USING YOUR HARNESS

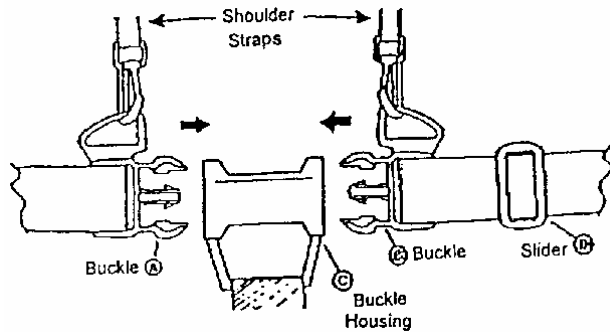

Your VALCO pram is fitted with a 5 point safety harness system.

TO SECURE YOUR CHILD IN THE HARNESS:

1. Insert Buckles (A) and (B) into either side of the Buckle Housing (C). Keep inserting until they click into place securely.
2. Carefully adjust the harness straps to snugly fit your child by adjusting the Sliders (D) located on all Shoulder Straps, Waist Straps and Crotch Strap.

The harness should be snugly fitted to the baby's body, tight enough so that the baby cannot wriggle itself free of the straps but loose enough so as not to cause the baby any discomfort.

TO OPEN THE HARNESS:

1. Release the Buckle Prongs – Squeeze on the top and bottom prongs simultaneously and pull apart from the Buckle Housing.

This process may be difficult as your buckle system has been designed to meet very stringent safety standards to ensure that a child cannot release the harness unaided.

ADJUSTING EACH SEAT

- A. To Recline, simultaneously press down on the two seat adjustor buttons on either side, at the rear of each seat.
- B. Gently ease the seat backward to desired position.
- C. To raise the seat, place one hand into the center of the seat back and firmly push upward to the desired position.

NOTE: Never adjust the seat while a child is seated in it.



FOLDING YOUR STROLLER

- A. Swivel the wheels so that they are facing the rear (normal walking position).
- B. Fold the hoods so that they are resting closed against the stroller frame.
- C. Adjust each seat to the fully upright position.
- D. Lift each frame lock in turn with your foot.
- E. Press down on the secondary lock with your foot while simultaneously pushing the handles slightly forward.
- F. Push the handles forward all the way down to the floor.

HINT: You can also pull the legs upward toward you to meet the handles.

- G. Engage the locking clamp, hooking it over the central stroller leg.

